

DURARO

Stainless Steel Castors

Application:
Kitchen trolleys; food carts; food processing plants;
restaurants and commercial kitchens;
laboratory equipments.

Size Available:
75x32, 100x32, 125x32, 150x32, 200x32mm

If your mobile equipment is subjected to frequent contact or exposure to moisture, our Duraro would be your absolute choice of castor.

For the same reason, it is a must for most kitchen and food carts which are constantly moved in and out of refrigerating room and steamy kitchen, then hose cleaned to rid of food debris and oil stain, nothing other than stainless steel can stay shiny under such adverse conditions.

On the other extreme, medical or laboratory equipments that has to be sanitized with disinfectants would find Duraro suitable at all time.



Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB Directional locking brake

Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.


P Top Plate Fitting



PRB-SS Wheel

Plastic hub, grey color elastic rubber tire

Brake type	mm	mm	mm	mm	mm	mm	mm	mm	kg	Code
TB Total locking brake	75	32		95 x 70	75 x 52 / 72 x 45	9.0	33.0	107.0	50	Y380XP1SS/W324S
	75	32		77 x 67	61.5 x 52 / 56 x 45	8.5	33.0	107.0	50	Y380XP2SS/W324S
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480XP1SS/W424DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480XP2SS/W424DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580XP1SS/W524DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580XP2SS/W524DS
	150	32		95 x 70	75 x 52 / 72 x 45	9.0	50.0	189.5	100	Y680XP1SS/W624DS
	150	32		77 x 67	61.5 x 52 / 56 x 45	8.5	50.0	189.5	100	Y680XP2SS/W624DS
TB Total locking brake	75	32		95 x 70	75 x 52 / 72 x 45	9.0	41.0	107.0	50	Y380P1SS/W324S
	75	32		77 x 67	61.5 x 52 / 56 x 45	8.5	41.0	107.0	50	Y380P2SS/W324S
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480P1SS/W424DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480P2SS/W424DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580P1SS/W524DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580P2SS/W524DS
	150	32		95 x 70	75 x 52 / 72 x 45	9.0	46.5	189.5	100	Y680P1SS/W624DS
	150	32		77 x 67	61.5 x 52 / 56 x 45	8.5	46.5	189.5	100	Y680P2SS/W624DS

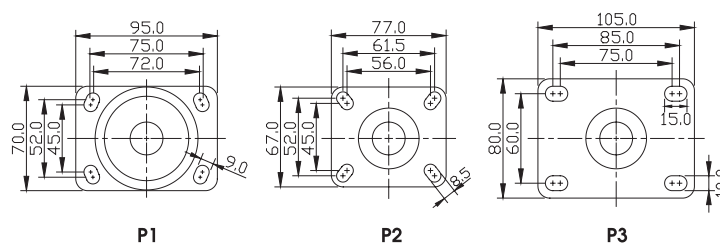



TB Total locking brake
Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

P Top Plate Fitting



PRB-SS Wheel Plastic hub, grey color elastic rubber tire

Brake type	mm	mm		mm	mm	mm	mm	mm	kg	Code
DB Dir. locking brake	75	32		95 x 70	75 x 52 / 72 x 45	9.0	33.0	107.0	50	Y380XDP1SS/W324S
	75	32		77 x 67	61.5 x 52 / 56 x 45	8.5	33.0	107.0	50	Y380XDP2SS/W324S
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480XDP1SS/W424DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480XDP2SS/W424DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580XDP1SS/W524DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580XDP2SS/W524DS
	150	32		95 x 70	75 x 52 / 72 x 45	9.0	50.0	189.5	100	Y680XDP1SS/W624DS
	150	32		77 x 67	61.5 x 52 / 56 x 45	8.5	50.0	189.5	100	Y680XDP2SS/W624DS
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y481P1SS/W424DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y481P2SS/W424DS
Non-brake Free swivel	100	32		105 x 80	85 x 60 / 75 x 60	10.0	40.5	135.0	80	Y481P3SS/W424DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y581P1SS/W524DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y581P2SS/W524DS
	125	32		105 x 80	85 x 60 / 75 x 60	10.0	39.0	161.0	100	Y581P3SS/W524DS
	150	32		95 x 70	75 x 52 / 72 x 45	9.0	50.0	189.5	100	Y681P1SS/W624DS
	150	32		77 x 67	61.5 x 52 / 56 x 45	8.5	50.0	189.5	100	Y681P2SS/W624DS
	150	32		105 x 80	85 x 60 / 75 x 60	10.0	50.0	189.5	100	Y681P3SS/W624DS



Stainless steel

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB Directional locking brake


Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

P Top Plate Fitting



PRB-SS Wheel Plastic hub, grey color elastic rubber tire

Brake type	 mm	 mm	 mm	 mm	 mm	 mm	 mm	 mm	kg	Code
Non-brake Fixed	75	32		95 x 77	75 x 52 / 72 x 45	9.0	107.0	50		Y382P1SS/W324S
	100	32		95 x 77	75 x 52 / 72 x 45	9.0	135.0	80		Y482P1SS/W424DS
	125	32		95 x 77	75 x 52 / 72 x 45	9.0	161.0	100		Y582P1SS/W524DS
	150	32		95 x 77	75 x 52 / 72 x 45	9.0	189.5	100		Y682P1SS/W624DS
	75	32		67 x 77	52 x 61.5 / 45 x 56	8.5	107.0	50		Y385P2SS/W324S
	100	32		67 x 77	52 x 61.5 / 45 x 56	8.5	135.0	80		Y485P2SS/W424DS
	125	32		67 x 77	52 x 61.5 / 45 x 56	8.5	161.0	100		Y585P2SS/W524DS

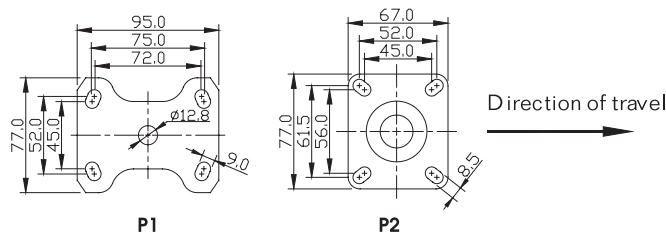



TB/ Total locking brake

Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

P Top Plate Fitting




TPR-SS Wheel

Plastic hub, grey color thermoplastic rubber tire

Brake type	mm	mm		mm	mm	mm	mm	mm	kg	Code
TB/ Total locking brake	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480XP1SS/W403DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480XP2SS/W403DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580XP1SS/W503DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580XP2SS/W503DS
	200	32		95 x 70	75 x 52 / 72 x 45	9.0	57.5	235.0	120	Y880XP1SS/W803UXS
TB/ Total locking brake	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480P1SS/W403DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480P2SS/W403DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580P1SS/W503DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580P2SS/W503DS
DB/ Dir. locking brake	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480XDP1SS/W403DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480XDP2SS/W403DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580XDP1SS/W503DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580XDP2SS/W503DS
	200	32		95 x 70	75 x 52 / 72 x 45	9.0	57.5	235.0	120	Y880XDP1SS/W803UXS



Stainless steel

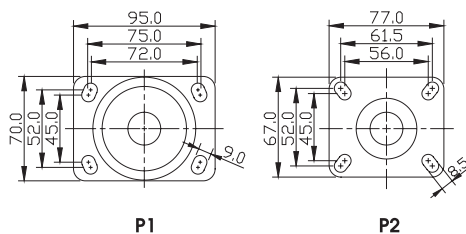

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB Directional locking brake

Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

P Top Plate Fitting



TPR-SS Wheel

Plastic hub, grey color thermoplastic rubber tire

Brake type	mm	mm		mm	mm	mm	mm	mm	kg	Code
Non-brake Free swivel	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y481P1SS/W403DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y481P2SS/W403DS
	100	32		105 x 80	85 x 60 / 75 x 60	10.0	40.5	135.0	80	Y481P3SS/W403DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y581P1SS/W503DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y581P2SS/W503DS
	125	32		105 x 80	85 x 60 / 75 x 60	10.0	39.0	161.0	100	Y581P3SS/W503DS
	200	32		95 x 70	75 x 52 / 72 x 45	9.0	57.5	235.0	120	Y881P1SS/W803UXS
Brake type	mm	mm		mm	mm	mm	mm	mm	kg	Code
Non-brake Fixed	100	32		95 x 77	75 x 52 / 72 x 45	9.0	135.0	80		Y482P1SS/W403DS
	125	32		95 x 77	75 x 52 / 72 x 45	9.0	161.0	100		Y582P1SS/W503DS
	100	32		67 x 77	52 x 61.5 / 45 x 56	8.5	135.0	80		Y485P2SS/W403DS
	125	32		67 x 77	52 x 61.5 / 45 x 56	8.5	161.0	100		Y585P2SS/W503DS



TPR-SS/AS Wheel

Conductive wheels are also available

Plastic hub, grey color conductive thermoplastic rubber tire, stainless steel ball bearings, stainless steel threadguards

100 x 32mm

Code


W403DS-AS

125 x 32mm

W503DS-AS



Electrical Resistance $\leq 10^4 \Omega$

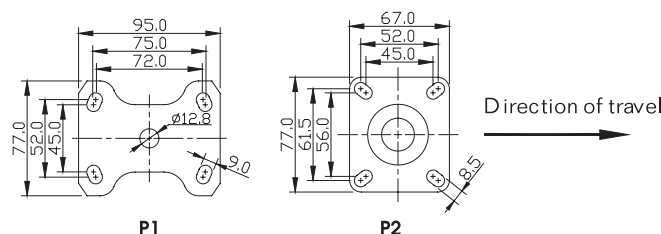



TB Total locking brake
Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.


P Top Plate Fitting

TPU-SS Wheel Plastic hub, grey color polyurethane tire

Brake type	mm	mm	mm	mm	mm	mm	mm	mm	kg	Code
TB Total locking brake	75	32		95 x 70	75 x 52 / 72 x 45	9.0	33.0	107.0	50	Y380XP1SS/W300S
	75	32		77 x 67	61.5 x 52 / 56 x 45	8.5	33.0	107.0	50	Y380XP2SS/W300S
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480XP1SS/W400DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480XP2SS/W400DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580XP1SS/W500DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580XP2SS/W500DS
	150	32		95 x 70	75 x 52 / 72 x 45	9.0	50.0	189.5	100	Y680XP1SS/W600DS
	150	32		77 x 67	61.5 x 52 / 56 x 45	8.5	50.0	189.5	100	Y680XP2SS/W600DS
TB Total locking brake	75	32		95 x 70	75 x 52 / 72 x 45	9.0	41.0	107.0	50	Y380P1SS/W300S
	75	32		77 x 67	61.5 x 52 / 56 x 45	8.5	41.0	107.0	50	Y380P2SS/W300S
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480P1SS/W400DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480P2SS/W400DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580P1SS/W500DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580P2SS/W500DS
	150	32		95 x 70	75 x 52 / 72 x 45	9.0	46.5	189.5	100	Y680P1SS/W600DS
	150	32		77 x 67	61.5 x 52 / 56 x 45	8.5	46.5	189.5	100	Y680P2SS/W600DS



Stainless steel

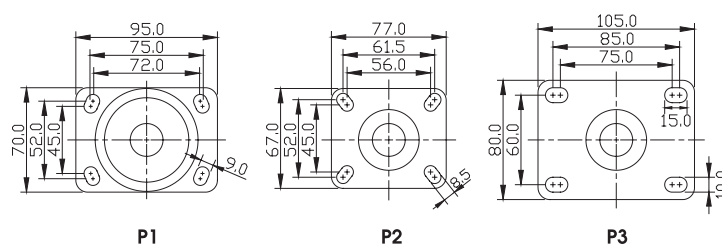

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



Directional locking brake

Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.


P Top Plate Fitting



TPU-SS Wheel

Plastic hub, grey color polyurethane tire

Brake type	mm	mm	mm	mm	mm	mm	mm	mm	kg	Code
Dir. locking brake	75	32		95 x 70	75 x 52 / 72 x 45	9.0	33.0	107.0	50	Y380XDP1SS/W300S
	75	32		77 x 67	61.5 x 52 / 56 x 45	8.5	33.0	107.0	50	Y380XDP2SS/W300S
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480XDP1SS/W400DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480XDP2SS/W400DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580XDP1SS/W500DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580XDP2SS/W500DS
	150	32		95 x 70	75 x 52 / 72 x 45	9.0	50.0	189.5	100	Y680XDP1SS/W600DS
	150	32		77 x 67	61.5 x 52 / 56 x 45	8.5	50.0	189.5	100	Y680XDP2SS/W600DS
Non-brake Free swivel	75	32		95 x 70	75 x 52 / 72 x 45	9.0	33.0	107.0	50	Y381P1SS/W300S
	75	32		77 x 67	61.5 x 52 / 56 x 45	8.5	33.0	107.0	50	Y381P2SS/W300S
	75	32		105 x 80	85 x 60 / 75 x 60	10.0	33.0	107.0	50	Y381P3SS/W300S
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y481P1SS/W400DS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y481P2SS/W400DS
	100	32		105 x 80	85 x 60 / 75 x 60	10.0	40.5	135.0	80	Y481P3SS/W400DS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y581P1SS/W500DS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y581P2SS/W500DS
	125	32		105 x 80	85 x 60 / 75 x 60	10.0	39.0	161.0	100	Y581P3SS/W500DS
	150	32		95 x 70	75 x 52 / 72 x 45	9.0	50.0	189.5	100	Y681P1SS/W600DS
	150	32		77 x 67	61.5 x 52 / 56 x 45	8.5	50.0	189.5	100	Y681P2SS/W600DS
	150	32		105 x 80	85 x 60 / 75 x 60	10.0	50.0	189.5	100	Y681P3SS/W600DS

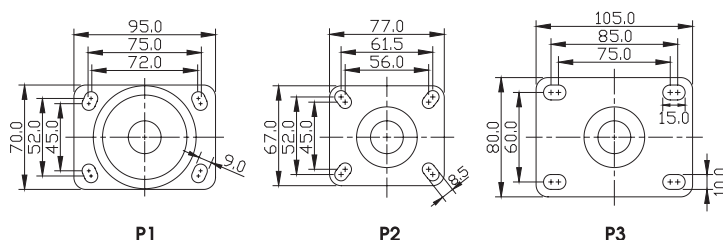

P1

P2

P3



TB Total locking brake


Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

P Top Plate Fitting




TPU-SS Wheel Plastic hub, grey color polyurethane tire

Brake type	 mm	 mm		 mm	 mm	 mm	 mm	 kg	Code
Non-brake Fixed	75	32		95 x 77	75 x 52 / 72 x 45	9.0	107.0	50	Y382P1SS/W300S
	100	32		95 x 77	75 x 52 / 72 x 45	9.0	135.0	80	Y482P1SS/W400DS
	125	32		95 x 77	75 x 52 / 72 x 45	9.0	161.0	100	Y582P1SS/W500DS
	150	32		95 x 77	75 x 52 / 72 x 45	9.0	189.5	100	Y682P1SS/W600DS
	75	32		67 x 77	52 x 61.5 / 45 x 56	8.5	107.0	50	Y385P2SS/W300S
	100	32		67 x 77	52 x 61.5 / 45 x 56	8.5	135.0	80	Y485P2SS/W400DS
	125	32		67 x 77	52 x 61.5 / 45 x 56	8.5	161.0	100	Y585P2SS/W500DS



 Stainless steel

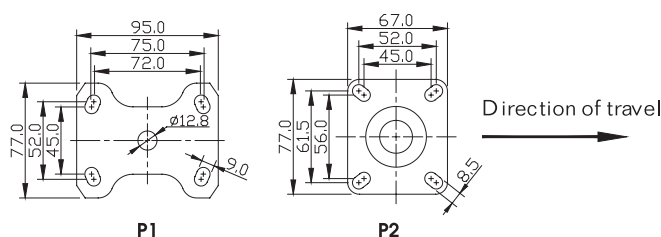

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB Total locking brake
Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB Directional locking brake
Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.


P Top Plate Fitting



PM-SS Wheel

Solid nylon wheel, stainless steel roller bearing, stainless steel threadguards

Brake type	mm	mm	mm	mm	mm	mm	mm	mm	kg	Code
TB Total locking brake	75	32		95 x 70	75 x 52 / 72 x 45	9.0	33.0	107.0	50	Y380XP1SS/W309RXS
	75	32		77 x 67	61.5 x 52 / 56 x 45	8.5	33.0	107.0	50	Y380XP2SS/W309RXS
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480XP1SS/W409RXS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480XP2SS/W409RXS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580XP1SS/W509RXS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580XP2SS/W509RXS
TB Total locking brake	75	32		95 x 70	75 x 52 / 72 x 45	9.0	41.0	107.0	50	Y380P1SS/W309RXS
	75	32		77 x 67	61.5 x 52 / 56 x 45	8.5	41.0	107.0	50	Y380P2SS/W309RXS
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480P1SS/W409RXS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480P2SS/W409RXS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580P1SS/W509RXS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580P2SS/W509RXS
DB Dir. locking brake	75	32		95 x 70	75 x 52 / 72 x 45	9.0	33.0	107.0	50	Y380XDP1SS/W309RXS
	75	32		77 x 67	61.5 x 52 / 56 x 45	8.5	33.0	107.0	50	Y380XDP2SS/W309RXS
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y480XDP1SS/W409RXS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y480XDP2SS/W409RXS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y580XDP1SS/W509RXS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y580XDP2SS/W509RXS

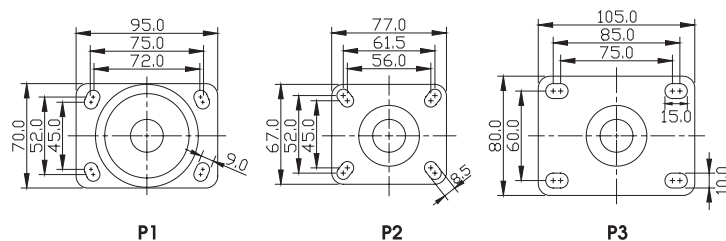



TB Total locking brake
Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

P Top Plate Fitting



PM-SS Wheel

Solid nylon wheel, stainless steel roller bearing, stainless steel threadguards


Brake type	mm	mm	mm	mm	mm	mm	mm	mm	kg	Code
Non-brake Free swivel	75	32		95 x 70	75 x 52 / 72 x 45	9.0	33.0	107.0	50	Y381P1SS/W309RXS
	75	32		77 x 67	61.5 x 52 / 56 x 45	8.5	33.0	107.0	50	Y381P2SS/W309RXS
	75	32		105 x 80	85 x 60 / 75 x 60	10.0	33.0	107.0	50	Y381P3SS/W309RXS
	100	32		95 x 70	75 x 52 / 72 x 45	9.0	40.5	135.0	80	Y481P1SS/W409RXS
	100	32		77 x 67	61.5 x 52 / 56 x 45	8.5	40.5	135.0	80	Y481P2SS/W409RXS
	100	32		105 x 80	85 x 60 / 75 x 60	10.0	40.5	135.0	80	Y481P3SS/W409RXS
	125	32		95 x 70	75 x 52 / 72 x 45	9.0	39.0	161.0	100	Y581P1SS/W509RXS
	125	32		77 x 67	61.5 x 52 / 56 x 45	8.5	39.0	161.0	100	Y581P2SS/W509RXS
	125	32		105 x 80	85 x 60 / 75 x 60	10.0	39.0	161.0	100	Y581P3SS/W509RXS



Brake type	mm	mm	mm	mm	mm	mm	mm	kg	Code
Non-brake Fixed	75	32		95 x 77	75 x 52 / 72 x 45	9.0	107.0	50	Y382P1SS/W309RXS
	100	32		95 x 77	75 x 52 / 72 x 45	9.0	135.0	80	Y482P1SS/W409RXS
	125	32		95 x 77	75 x 52 / 72 x 45	9.0	161.0	100	Y582P1SS/W509RXS
	75	32		67 x 77	52 x 61.5 / 45 x 56	8.5	107.0	50	Y385P2SS/W309RXS
	100	32		67 x 77	52 x 61.5 / 45 x 56	8.5	135.0	80	Y485P2SS/W409RXS
	125	32		67 x 77	52 x 61.5 / 45 x 56	8.5	161.0	100	Y585P2SS/W509RXS



Stainless steel

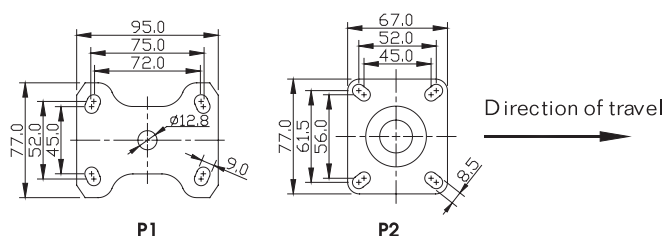

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB Directional locking brake

Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

T Threaded Stem Fitting with Hex Base Washer



PRB-SS Wheel

Plastic hub, grey color elastic rubber tire

Brake type	mm	mm		mm	mm	mm	mm	kg	Code
TB Total locking brake	75	32		1/2-13UNC	1"	33.0	107.0	50	Y380XT2SS/W324S
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y380XT4SS/W324S
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y380XT5SS/W324S
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480XT2SS/W424DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480XT4SS/W424DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480XT5SS/W424DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580XT2SS/W524DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580XT4SS/W524DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580XT5SS/W524DS
TB Total locking brake	150	32		1/2-13UNC	1"	50.0	189.5	100	Y680XT2SS/W624DS
	150	32		M12 P1.75	25.0	50.0	189.5	100	Y680XT4SS/W624DS
	150	32		M16 P2.0	25.0	50.0	189.5	100	Y680XT5SS/W624DS
	75	32		1/2-13UNC	1"	41.0	107.0	50	Y380T2SS/W324S
	75	32		M12 P1.75	25.0	41.0	107.0	50	Y380T4SS/W324S
	75	32		M16 P2.0	25.0	41.0	107.0	50	Y380T5SS/W324S
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480T2SS/W424DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480T4SS/W424DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480T5SS/W424DS
TB Total locking brake	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580T2SS/W524DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580T4SS/W524DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580T5SS/W524DS
	150	32		1/2-13UNC	1"	46.5	189.5	100	Y680T2SS/W624DS
	150	32		M12 P1.75	25.0	46.5	189.5	100	Y680T4SS/W624DS
	150	32		M16 P2.0	25.0	46.5	189.5	100	Y680T5SS/W624DS





TB Total locking brake

Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

T Threaded Stem Fitting with Hex Base Washer



PRB-SS Wheel Plastic hub, grey color elastic rubber tire

Brake type	 mm	 mm		 mm	 mm	 mm	 mm	 kg	Code
Non-brake Free swivel	75	32		1/2-13UNC	1"	33.0	107.0	50	Y381T2SS/W324S
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y381T4SS/W324S
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y381T5SS/W324S
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y481T2SS/W424DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y481T4SS/W424DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y481T5SS/W424DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y581T2SS/W524DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y581T4SS/W524DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y581T5SS/W524DS
	150	32		1/2-13UNC	1"	50.0	189.5	100	Y681T2SS/W624DS
	150	32		M12 P1.75	25.0	50.0	189.5	100	Y681T4SS/W624DS
	150	32		M16 P2.0	25.0	50.0	189.5	100	Y681T5SS/W624DS



 Stainless steel

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB/4 Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB/4 Directional locking brake

Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

T Threaded Stem Fitting with Hex Base Washer



TPR-SS Wheel

Plastic hub, grey color thermoplastic rubber tire

Brake type	 mm	 mm		 mm	 mm	 mm	 mm	 kg	Code
TB/4 Total locking brake	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480XT2SS/W403DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480XT4SS/W403DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480XT5SS/W403DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580XT2SS/W503DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580XT4SS/W503DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580XT5SS/W503DS
TB/3 Total locking brake	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480T2SS/W403DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480T4SS/W403DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480T5SS/W403DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580T2SS/W503DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580T4SS/W503DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580T5SS/W503DS





TB Total locking brake

Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

T Threaded Stem Fitting with Hex Base Washer



TPR-SS Wheel

Plastic hub, grey color thermoplastic rubber tire

Brake type	 mm	 mm		 mm	 mm	 mm	 mm	 kg	Code
Non-brake Free swivel	100	32		1/2-13UNC	1"	40.5	135.0	80	Y481T2SS/W403DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y481T4SS/W403DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y481T5SS/W403DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y581T2SS/W503DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y581T4SS/W503DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y581T5SS/W503DS



TPR-SS/AS Wheel

Conductive wheels are also available

Plastic hub, grey color conductive thermoplastic rubber tire, stainless steel ball bearings, stainless steel threadguards


100 x 32mm

125 x 32mm

Code

W403DS-AS

W503DS-AS



Electrical Resistance $\leq 10^4 \Omega$

 Stainless steel

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB/A Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB/A Directional locking brake

Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

T Threaded Stem Fitting with Hex Base Washer



TPU-SS Wheel Plastic hub, grey color polyurethane tire

Brake type	mm	mm		mm	mm	mm	mm	kg	Code
TB/A Total locking brake	75	32		1/2-13UNC	1"	33.0	107.0	50	Y380XT2SS/W300S
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y380XT4SS/W300S
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y380XT5SS/W300S
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480XT2SS/W400DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480XT4SS/W400DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480XT5SS/W400DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580XT2SS/W500DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580XT4SS/W500DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580XT5SS/W500DS
TB/B Total locking brake	150	32		1/2-13UNC	1"	50.0	189.5	100	Y680XT2SS/W600DS
	150	32		M12 P1.75	25.0	50.0	189.5	100	Y680XT4SS/W600DS
	150	32		M16 P2.0	25.0	50.0	189.5	100	Y680XT5SS/W600DS
	75	32		1/2-13UNC	1"	41.0	107.0	50	Y380T2SS/W300S
	75	32		M12 P1.75	25.0	41.0	107.0	50	Y380T4SS/W300S
	75	32		M16 P2.0	25.0	41.0	107.0	50	Y380T5SS/W300S
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480T2SS/W400DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480T4SS/W400DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480T5SS/W400DS
TB/B Total locking brake	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580T2SS/W500DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580T4SS/W500DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580T5SS/W500DS
	150	32		1/2-13UNC	1"	46.5	189.5	100	Y680T2SS/W600DS
	150	32		M12 P1.75	25.0	46.5	189.5	100	Y680T4SS/W600DS
	150	32		M16 P2.0	25.0	46.5	189.5	100	Y680T5SS/W600DS





TB Total locking brake

Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

T Threaded Stem Fitting with Hex Base Washer



TPU-SS Wheel Plastic hub, grey color polyurethane tire

Brake type	 mm	 mm		 mm	 mm	 mm	 mm	 kg	Code
Non-brake Free swivel	75	32		1/2-13UNC	1"	33.0	107.0	50	Y381T2SS/W300S
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y381T4SS/W300S
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y381T5SS/W300S
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y481T2SS/W400DS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y481T4SS/W400DS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y481T5SS/W400DS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y581T2SS/W500DS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y581T4SS/W500DS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y581T5SS/W500DS
	150	32		1/2-13UNC	1"	50.0	189.5	100	Y681T2SS/W600DS
	150	32		M12 P1.75	25.0	50.0	189.5	100	Y681T4SS/W600DS
	150	32		M16 P2.0	25.0	50.0	189.5	100	Y681T5SS/W600DS



 Stainless steel

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB/A Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB/A Directional locking brake

Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

T Threaded Stem Fitting with Hex Base Washer



PM-SS Wheel

Solid nylon wheel, stainless steel roller bearing, stainless steel threadguards

Brake type	mm	mm		mm	mm	mm	mm	kg	Code
TB/A Total locking brake	75	32		1/2-13UNC	1"	33.0	107.0	50	Y380XT2SS/W309RXS
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y380XT4SS/W309RXS
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y380XT5SS/W309RXS
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480XT2SS/W409RXS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480XT4SS/W409RXS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480XT5SS/W409RXS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580XT2SS/W509RXS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580XT4SS/W509RXS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580XT5SS/W509RXS
TB/B Total locking brake	75	32		1/2-13UNC	1"	41.0	107.0	50	Y380T2SS/W309RXS
	75	32		M12 P1.75	25.0	41.0	107.0	50	Y380T4SS/W309RXS
	75	32		M16 P2.0	25.0	41.0	107.0	50	Y380T5SS/W309RXS
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y480T2SS/W409RXS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y480T4SS/W409RXS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y480T5SS/W409RXS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y580T2SS/W509RXS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y580T4SS/W509RXS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y580T5SS/W509RXS





TB Total locking brake
Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

T Threaded Stem Fitting with Hex Base Washer



PM-SS Wheel

Solid nylon wheel, stainless steel roller bearing, stainless steel threadguards

Brake type	 mm	 mm		 mm	 mm	 mm	 mm	 kg	Code
Non-brake Free swivel	75	32		1/2-13UNC	1"	33.0	107.0	50	Y381T2SS/W309RXS
	75	32		M12 P1.75	25.0	33.0	107.0	50	Y381T4SS/W309RXS
	75	32		M16 P2.0	25.0	33.0	107.0	50	Y381T5SS/W309RXS
	100	32		1/2-13UNC	1"	40.5	135.0	80	Y481T2SS/W409RXS
	100	32		M12 P1.75	25.0	40.5	135.0	80	Y481T4SS/W409RXS
	100	32		M16 P2.0	25.0	40.5	135.0	80	Y481T5SS/W409RXS
	125	32		1/2-13UNC	1"	39.0	161.0	100	Y581T2SS/W509RXS
	125	32		M12 P1.75	25.0	39.0	161.0	100	Y581T4SS/W509RXS
	125	32		M16 P2.0	25.0	39.0	161.0	100	Y581T5SS/W509RXS



Stainless steel

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB/A Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB/A Directional locking brake

Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

H Bolt Hole Fitting



PRB-SS Wheel

Plastic hub, grey color elastic rubber tire

Brake type	mm	mm		mm	mm	mm	kg	Code
TB/A Total locking brake	75	32		10.3	33.0	104.5	50	Y380XH1SS/W324S
	75	32		12.3	33.0	104.5	50	Y380XH2SS/W324S
	75	32		12.8	33.0	104.5	50	Y380XH3SS/W324S
	100	32		10.3	40.5	132.5	80	Y480XH1SS/W424DS
	100	32		12.3	40.5	132.5	80	Y480XH2SS/W424DS
	100	32		12.8	40.5	132.5	80	Y480XH3SS/W424DS
	125	32		10.3	39.0	158.5	100	Y580XH1SS/W524DS
	125	32		12.3	39.0	158.5	100	Y580XH2SS/W524DS
	125	32		12.8	39.0	158.5	100	Y580XH3SS/W524DS
TB/B Total locking brake	75	32		10.3	41.0	104.5	50	Y380H1SS/W324S
	75	32		12.3	41.0	104.5	50	Y380H2SS/W324S
	75	32		12.8	41.0	104.5	50	Y380H3SS/W324S
	100	32		10.3	40.5	132.5	80	Y480H1SS/W424DS
	100	32		12.3	40.5	132.5	80	Y480H2SS/W424DS
	100	32		12.8	40.5	132.5	80	Y480H3SS/W424DS
	125	32		10.3	39.0	158.5	100	Y580H1SS/W524DS
	125	32		12.3	39.0	158.5	100	Y580H2SS/W524DS
	125	32		12.8	39.0	158.5	100	Y580H3SS/W524DS
DB/A Directional locking brake	150	32		10.3	50.0	187.0	100	Y680XH1SS/W624DS
	150	32		12.3	50.0	187.0	100	Y680XH2SS/W624DS
	150	32		12.8	50.0	187.0	100	Y680XH3SS/W624DS
	150	32		10.3	46.5	187.0	100	Y680H1SS/W624DS
	150	32		12.3	46.5	187.0	100	Y680H2SS/W624DS
	150	32		12.8	46.5	187.0	100	Y680H3SS/W624DS
	150	32		10.3	46.5	187.0	100	Y680H1SS/W624DS
	150	32		12.3	46.5	187.0	100	Y680H2SS/W624DS
	150	32		12.8	46.5	187.0	100	Y680H3SS/W624DS





TB Total locking brake
Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

H Bolt Hole Fitting



PRB-SS Wheel Plastic hub, grey color elastic rubber tire

Brake type	 mm	 mm		 mm	 mm	 mm	 kg	Code
Non-brake Free swivel	75	32		10.3	33.0	104.5	50	Y381H1SS/W324S
	75	32		12.3	33.0	104.5	50	Y381H2SS/W324S
	75	32		12.8	33.0	104.5	50	Y381H3SS/W324S
	100	32		10.3	40.5	132.5	80	Y481H1SS/W424DS
	100	32		12.3	40.5	132.5	80	Y481H2SS/W424DS
	100	32		12.8	40.5	132.5	80	Y481H3SS/W424DS
	125	32		10.3	39.0	158.5	100	Y581H1SS/W524DS
	125	32		12.3	39.0	158.5	100	Y581H2SS/W524DS
	125	32		12.8	39.0	158.5	100	Y581H3SS/W524DS
	150	32		10.3	50.0	187.0	100	Y681H1SS/W624DS
	150	32		12.3	50.0	187.0	100	Y681H2SS/W624DS
	150	32		12.8	50.0	187.0	100	Y681H3SS/W624DS



 Stainless steel

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB/A Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB/A Directional locking brake

Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

H Bolt Hole Fitting



TPR-SS Wheel

Plastic hub, grey color thermoplastic rubber tire

Brake type	 mm	 mm		 mm	 mm	 mm	 kg	Code
TB/A Total locking brake	100	32		10.3	40.5	132.5	80	Y480XH1SS/W403DS
	100	32		12.3	40.5	132.5	80	Y480XH2SS/W403DS
	100	32		12.8	40.5	132.5	80	Y480XH3SS/W403DS
	125	32		10.3	39.0	158.5	100	Y580XH1SS/W503DS
	125	32		12.3	39.0	158.5	100	Y580XH2SS/W503DS
	125	32		12.8	39.0	158.5	100	Y580XH3SS/W503DS
TB/B Total locking brake	100	32		10.3	40.5	132.5	80	Y480H1SS/W403DS
	100	32		12.3	40.5	132.5	80	Y480H2SS/W403DS
	100	32		12.8	40.5	132.5	80	Y480H3SS/W403DS
	125	32		10.3	39.0	158.5	100	Y580H1SS/W503DS
	125	32		12.3	39.0	158.5	100	Y580H2SS/W503DS
	125	32		12.8	39.0	158.5	100	Y580H3SS/W503DS





TB Total locking brake
Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

H Bolt Hole Fitting



TPR-SS Wheel Plastic hub, grey color thermoplastic rubber tire

Brake type	 mm	 mm		 mm	 mm	 mm	 kg	Code
Non-brake Free swivel	100	32		10.3	40.5	132.5	80	Y481H1SS/W403DS
	100	32		12.3	40.5	132.5	80	Y481H2SS/W403DS
	100	32		12.8	40.5	132.5	80	Y481H3SS/W403DS
	125	32		10.3	39.0	158.5	100	Y581H1SS/W503DS
	125	32		12.3	39.0	158.5	100	Y581H2SS/W503DS
	125	32		12.8	39.0	158.5	100	Y581H3SS/W503DS



TPR-SS/AS Wheel Conductive wheels are also available

		Code
Plastic hub, grey color conductive thermoplastic rubber tire, stainless steel ball bearings, stainless steel threadguards	100 x 32mm	W403DS-AS
	125 x 32mm	W503DS-AS



Electrical Resistance $\leq 10^4 \Omega$

 Stainless steel

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB/A Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB/A Directional locking brake

Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

H Bolt Hole Fitting



TPU-SS Wheel

Plastic hub, grey color polyurethane tire

Brake type	mm	mm		mm	mm	mm	kg	Code
TB/A Total locking brake	75	32		10.3	33.0	104.5	50	Y380XH1SS/W300S
	75	32		12.3	33.0	104.5	50	Y380XH2SS/W300S
	75	32		12.8	33.0	104.5	50	Y380XH3SS/W300S
	100	32		10.3	40.5	132.5	80	Y480XH1SS/W400DS
	100	32		12.3	40.5	132.5	80	Y480XH2SS/W400DS
	100	32		12.8	40.5	132.5	80	Y480XH3SS/W400DS
	125	32		10.3	39.0	158.5	100	Y580XH1SS/W500DS
	125	32		12.3	39.0	158.5	100	Y580XH2SS/W500DS
	125	32		12.8	39.0	158.5	100	Y580XH3SS/W500DS
TB/B Total locking brake	75	32		10.3	41.0	104.5	50	Y380H1SS/W300S
	75	32		12.3	41.0	104.5	50	Y380H2SS/W300S
	75	32		12.8	41.0	104.5	50	Y380H3SS/W300S
	100	32		10.3	40.5	132.5	80	Y480H1SS/W400DS
	100	32		12.3	40.5	132.5	80	Y480H2SS/W400DS
	100	32		12.8	40.5	132.5	80	Y480H3SS/W400DS
	125	32		10.3	39.0	158.5	100	Y580H1SS/W500DS
	125	32		12.3	39.0	158.5	100	Y580H2SS/W500DS
	125	32		12.8	39.0	158.5	100	Y580H3SS/W500DS
TB/C Total locking brake	150	32		10.3	46.5	187.0	100	Y680H1SS/W600DS
	150	32		12.3	46.5	187.0	100	Y680H2SS/W600DS
	150	32		12.8	46.5	187.0	100	Y680H3SS/W600DS





TB Total locking brake
Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

H Bolt Hole Fitting



TPU-SS Wheel Plastic hub, grey color polyurethane tire

Brake type	 mm	 mm		 mm	 mm	 mm	 kg	Code
Non-brake Free swivel	75	32		10.3	33.0	104.5	50	Y381H1SS/W300S
	75	32		12.3	33.0	104.5	50	Y381H2SS/W300S
	75	32		12.8	33.0	104.5	50	Y381H3SS/W300S
	100	32		10.3	40.5	132.5	80	Y481H1SS/W400DS
	100	32		12.3	40.5	132.5	80	Y481H2SS/W400DS
	100	32		12.8	40.5	132.5	80	Y481H3SS/W400DS
	125	32		10.3	39.0	158.5	100	Y581H1SS/W500DS
	125	32		12.3	39.0	158.5	100	Y581H2SS/W500DS
	125	32		12.8	39.0	158.5	100	Y581H3SS/W500DS
	150	32		10.3	50.0	187.0	100	Y681H1SS/W600DS
	150	32		12.3	50.0	187.0	100	Y681H2SS/W600DS
	150	32		12.8	50.0	187.0	100	Y681H3SS/W600DS



 Stainless steel

Pressed stainless steel double ballrace swivel yoke, electrolytic polishing finish



TB/A Total locking brake

Total Lock system locks both swivel head and wheel simultaneously for secure parking. Integrated ON/OFF Nylon brake pedals for easy and quiet operation.



DB/A Directional locking brake

Directional Lock permits free wheel rotation while swivel head remains locked, an easy way to keep equipment traveling straight. Integrated ON/OFF Nylon brake pedals for easy and quiet operation. Release pedal in green color.

H Bolt Hole Fitting



PM-SS Wheel

Solid nylon wheel, stainless steel roller bearing, stainless steel threadguards

Brake type	 mm	 mm		 mm	 mm	 mm	 kg	Code
TB/A Total locking brake	75	32		10.3	33.0	104.5	50	Y380XH1SS/W309RXS
	75	32		12.3	33.0	104.5	50	Y380XH2SS/W309RXS
	75	32		12.8	33.0	104.5	50	Y380XH3SS/W309RXS
	100	32		10.3	40.5	132.5	80	Y480XH1SS/W409RXS
	100	32		12.3	40.5	132.5	80	Y480XH2SS/W409RXS
	100	32		12.8	40.5	132.5	80	Y480XH3SS/W409RXS
	125	32		10.3	39.0	158.5	100	Y580XH1SS/W509RXS
	125	32		12.3	39.0	158.5	100	Y580XH2SS/W509RXS
	125	32		12.8	39.0	158.5	100	Y580XH3SS/W509RXS
TB/B Total locking brake	75	32		10.3	41.0	104.5	50	Y380H1SS/W309RXS
	75	32		12.3	41.0	104.5	50	Y380H2SS/W309RXS
	75	32		12.8	41.0	104.5	50	Y380H3SS/W309RXS
	100	32		10.3	40.5	132.5	80	Y480H1SS/W409RXS
	100	32		12.3	40.5	132.5	80	Y480H2SS/W409RXS
	100	32		12.8	40.5	132.5	80	Y480H3SS/W409RXS
	125	32		10.3	39.0	158.5	100	Y580H1SS/W509RXS
	125	32		12.3	39.0	158.5	100	Y580H2SS/W509RXS
	125	32		12.8	39.0	158.5	100	Y580H3SS/W509RXS





TB Total locking brake

Total Lock system simultaneously locks both swivel head and wheel for a secure parking.
Zinc-alloy brake pedal.

H Bolt Hole Fitting



PM-SS Wheel

Solid nylon wheel, stainless steel roller bearing, stainless steel threadguards

Brake type	 mm	 mm		 mm	 mm	 mm	 kg	Code
Non-brake Free swivel	75	32		10.3	33.0	104.5	50	Y381H1SS/W309RXS
	75	32		12.3	33.0	104.5	50	Y381H2SS/W309RXS
	75	32		12.8	33.0	104.5	50	Y381H3SS/W309RXS
	100	32		10.3	40.5	132.5	80	Y481H1SS/W409RXS
	100	32		12.3	40.5	132.5	80	Y481H2SS/W409RXS
	100	32		12.8	40.5	132.5	80	Y481H3SS/W409RXS
	125	32		10.3	39.0	158.5	100	Y581H1SS/W509RXS
	125	32		12.3	39.0	158.5	100	Y581H2SS/W509RXS
	125	32		12.8	39.0	158.5	100	Y581H3SS/W509RXS



 Stainless steel